




FG180W
 182cm³, 4.5kW (6.0Hp) / 3600rpm
 OVER HEAD VALVE
 FULL TRANSISTOR IGNITION
 CAST-IRON CYLINDER LINER

GENERAL SPECIFICATIONS

Engine Type	Forced air cooled 4-stroke, vertical shaft, OHV gasoline engine
Number of Cylinder	1
Bore x Stroke	68 x 50mm (2.68 x 1.97in.)
Piston Displacement	182cm ³ (11.1cu.in.)
Compression Ratio	8.5 : 1
Max.Horse Power	4.5kW (6.0Hp) / 3600rpm
Max.Torque	11.8N-m (8.7ft.lbs) / 3000rpm
Direction of Rotation	Counter-clockwise facing the PTO shaft
Fast Idle Speed	3600rpm
Slow Idle Speed	1550rpm
Fuel	Unleaded gasoline
Fuel Tank Capacity	2.4litre (2.5US.qt.)
Min.Specific Fuel Consumption Ratio	358gr / kW-hr (260gr / Hp-hr)
Oil	Gasoline engine oil SAE10W-30
Oil Capacity	0.7litre (0.7US.qt.)
Carburetor	Float type with fixed main jet
Ignition	Flywheel magneto transistor type
Plug	NGK BPR5ES
RFI	Per Canada and U.S.A.requirements
Starter	Recoil starter with Automatic Compression Release
Governor	Mechanical governor
Lubrication	Splash system
Air Cleaner	Dual element
Muffler	Low tone type
Brake System	Brake model is also available
Net Weight	15.5kg (34.2lbs)
Dimension (L x W x H)	385 x 327 x 359mm (15.16 x 12.87 x 14.13in.)

Specifications subject to change without notice.

PERFORMANCE CURVES

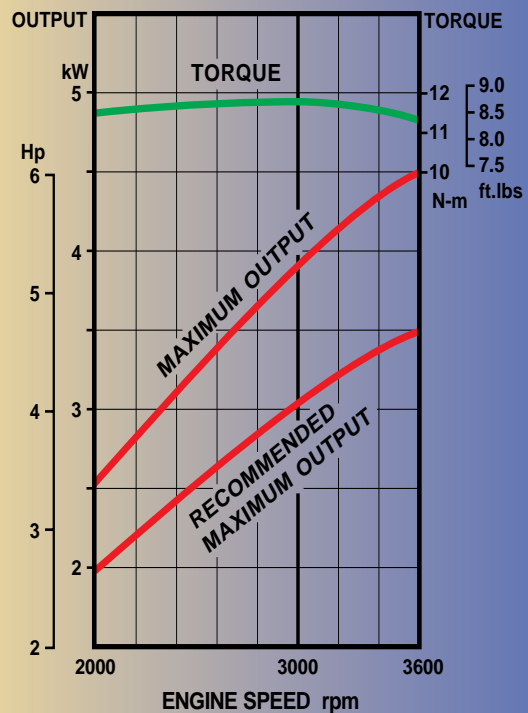

Kawasaki
 Let the good times roll.

